

KINDS OF LIVING ORGANISMS INVOLVED IN BIODETERIORATION

Living organisms that can cause biodeterioration are referred to as **biodeteriogens**.

Animals, insects and higher plants can be easily identified by visual observation and by examining their morphological and physiological characteristics. Micro and macro organisms cause chemical, physical changes as well as mechanical damage to materials. Relative humidity, temperature levels and other parameters determine whether these organisms flourish or exist at all. Microorganisms can cause damage through a range of processes.

Enzymes secreted by these organisms can be catalyzers of chemical reactions that stimulate an attack on the material

Microorganisms may utilize products of this reaction e.g. (corrosion products) or use certain product of the materials as source of carbon and energy.

Chemical damage which is also important may arise by excretion of acids. These acids are capable of chelating metal ions

Stone and wood may be damaged when they serve as substrate for some higher animals

Bushes and trees are observed on buildings. They can cause mechanical and chemical deterioration on constructions. During growth, plants and roots generate high pressure which may damage buildings.

1 Bacteria

Bacteria are a large diverse group of microscopic, prokaryotic, unicellular organisms. They can be of various shapes (spherical, rod-like or spiral) and may be motile or non-motile. They include both autotrophic and heterotrophic species, and can be aerobic or anaerobic, and many species can thrive under either condition. They have relatively simple nutritional needs, and are easily adaptable and can readily change to suit their environment.

The bacterial chemical action constitutes the major risk for the deterioration of stone. Especially harmful are those bacteria that obtain carbon from carbon dioxide or energy from light or by chemical redox reaction. Some are capable of utilizing inorganic compounds e.g. sulphur and nitrogen to produce sulphuric and nitric acids. These acids influence the pH of the environment where they live and cause damage to various stone structures. Example of a bacterium that uses the oxidation of hydrogen sulphide and sulphur as an energy source and converts this form of sulphur to sulphuric acid are the species in the genus *Thiobacillus*.

Sulphate reducing bacteria having the unique ability to convert sulphate to produce sulphites as metabolites are well known for the damage they cause to metals. *Desulfovibrio vulgaris* and *Desulfotomaculum nigrificans* produce H₂S that induce this corrosion on different systems. Examples of systems that can experience corrosion include oil and gas pipelines, gas distribution systems and sewage systems. Sulphate reducing bacteria use sulphate ions from the surrounding micro environment as an oxygen source for the oxidation of metals. The catalyzers of this process are the enzymes of the bacteria. The product of redox reactions in these processes is sulphide which is released. Microorganisms will support the corrosion of metals using corrosion products.

Bacteria may lead to a change in the physical characteristics of the wood e.g. permeability and absorptibility which can lead to loss of strength. Some bacteria such as those belonging to the genus *cytophaga* are highly specialized in the only substrate they can use as a carbon and energy source is cellulose. They can completely destroy the structure of cellulose fibres. These bacteria are highly distributed in soil, continental waters and seawaters.

2 Fungi

Fungi are a large group of small chemoheterotrophic organisms. They do not contain chlorophyll and therefore cannot make their own food by using sunlight. They are, however extremely adaptable and can utilize almost any organic material. Their growth is characterized by unicellular or multicellular filamentous hyphae, which can often be the cause of physical biodeterioration.

Most fungi are organisms with mycelium as their vegetative structure. Fungi can destroy the structural integrity of a material mechanically and chemically. Mechanical damage to stone, concrete and other building materials is caused by the intrusion of the hyphae into the structure and by the contraction and expansion of the mycelium with changing humidity. Mechanically, the hyphae grow into the structure. The fungi can colonize and form a film over the surface of the stone which blocks the pores. Any moisture that does penetrate through the stone will dry out more slowly which makes the material stay wetter for a long period which enables dissolved salt to penetrate more deeply. Wood destroying fungi induce several types of decay ranging from the formation of mycelia on the wood surface to destruction of wood and rot. Notably each species of fungus may attack different parts within the wood. Examples of the class fungi that can cause biodeterioration include *Basidiomycetes*, *Ascomycetes* and *Deuteromycetes*

3 Algae, Lichens and Mosses

Algae:

Algae are another group of microorganisms that grow in the water film, on the stone surface and deteriorate it. They are also found in buildings. They have also been found on limestone and sandstone as well as historical objects. Algae also attack stones by exhaled CO₂ which in the presence of water supports the dissolution of the carbonated components of stone. Again, mechanical deterioration of stone occurs if algae develops to an extent that the multicellular colonies generated increases the pressure on the walls of the pores thereby damaging the stones. Some algae living within the stone may contribute to this aggregation of the stone.

Lichens:

Excrete organic acids that attack materials and produce compounds such as salts of salicylic acid and tartaric acid which also degrade carbonates in an alkaline medium. Lichens have hyphae that can grow through the pores in stones. After absorbing water, they enlarge considerably in volume and affect the wall of pores by applying pressure on them. Lichens are extremely sensitive to gaseous sulphur compounds which account for their rare occurrence in polluted areas.

Mosses:

Often grow on the surface of stones that are covered by humus. They have the ability to absorb

large quantity of water and they also produce organic acids.

Pests attack wood in the soil, water and also in the ambient air. Here are different types of insect such as ants, termites, beetles and insects that frequently cause great damage to materials. Insects cause a loss of wood strength and in some extreme cases they result in the collapse of structures.

4 Higher plants

Higher plants are photoautotrophic organisms with specialized tissues and organs that show functional specialization. The humic acid present in roots systems attack carbonate compounds.

5 Insects

Insects include a large group of aerobic heterotrophic organisms. They need to feed on organic matter, but as a group are diverse in what they can consume. They can feed off all processed and unprocessed foods, as well as non-food items like binding materials and adhesives. Since some insects are attracted to the tight, dark places that abound in storage areas, and since stored foods and materials are handled infrequently, insects may do significant damage before they are discovered. Some examples of insect pests are silverfish, psocids, cockroaches, borer beetles, weevils and moths. Insects can be infected by disease-causing organisms such as bacteria, viruses and fungi. Besides causing significant biodeterioration themselves, insects can contaminate food or other organic matter.

6 Birds, mammals and reptiles

They are aerobic heterotrophic organisms that have fairly sophisticated food requirements. They can be very resourceful in their acquiring of food and can cause extensive physical damage. Their waste products can also serve as a source of nutrients for other biodeteriogens and can also be corrosive.

IMPACT OF PROCESSING ON BIODETERIORATION

Almost all food is processed in some way before it is eaten. Commercially, the main reasons to process food are to eliminate micro-organisms (which may cause disease) and to extend shelf life. Simply cooking or combining a food with other foodstuffs to create a recipe is also considered a form of food processing. Whatever the case, the nutrient value of any food is often altered by the processing.

Impacts of processing and storage of food

Some vitamins are more stable (less affected by processing) than others. Water-soluble vitamins (B-group and C) are more unstable than fat-soluble vitamins (K, A, D and E) during food processing and storage.

The most unstable vitamins include:

- Folate
- Thiamine
- Vitamin C.

More stable vitamins include:

- Niacin (vitamin B3)

- Vitamin K
- Vitamin D
- Biotin (vitamin B7)
- Bantothenic acid (vitamin B5).

Processes affecting food nutrient content

A variety of things can happen during the growing, harvesting, storage and preparing of food that can affect its nutritional content. Processes that expose foods to high levels of heat, light or oxygen cause the greatest nutrient loss.

Fertilizers

Most plant crops are produced with the aid of fertilized soils. High use of nitrogen fertilizers tends to reduce the vitamin C content in many fruit and vegetable crops. It does not seem to make any difference to the plant's nutrient value whether the fertilizer is organic or not.

Milling

Cereals such as wheat can be ground to remove the fibrous husks. The husks contain most of the plant's dietary fibre, B-group vitamins, phytochemicals and some minerals. That is why products such as white bread are less nutritious than whole meal varieties, even if they have been artificially fortified with some of the nutrients that were lost after milling. It is impossible to add back everything that is taken out, especially the phytochemicals. The 'fibre' that is added back to some products is often in the form of resistant starch, which may not be as beneficial as the fibre removed.



Milling of wheat

Blanching

Before a food is canned or frozen, it is usually heated very quickly with steam or water. The water-soluble vitamins, including vitamin C and B-complex, are sensitive and easily destroyed by blanching.



Blanching of vegetables

Canning

Food is heated inside the can to kill any dangerous micro-organisms and extend the food's shelf life. Some types of micro-organisms require severe heat treatment and this may affect the taste and texture of the food, making it less appealing. Preservatives are generally not needed or used in canned foods. Water-soluble vitamins are particularly sensitive to high temperatures. Many people believe that canned foods are not as nutritious as their fresh counterparts, but this is not always the case, as fresh food often deteriorates more rapidly than canned foods.



Freezing

The nutrient value of a food is retained when it is frozen. Any nutrient losses are due to the processing prior to freezing and the cooking once the frozen food is thawed.



Pasteurization

Pasteurization involves heating liquid foods such as milk and fruit juices to specific temperatures to destroy micro-organisms. The nutrient value of milk is generally unaffected. In the case of pasteurized fruit juices, some losses of vitamin C can occur.

Heat Preservation

- **Pasteurization:** A food preservation process that heats liquids to 160°F (71°C) for 15 seconds, or 143°F (62°C) for 30 minutes, in order to kill bacteria, yeasts, and molds.



High pressure processing

This alternative preservation method subjects a food to elevated pressures, with or without the use of heat to kill micro-organisms. This method has been used in foods such as fruit juices. As heat is not required, this process impacts less on the vitamin content, flavour and colour of foods.

High Pressure Processing of Food

- High pressure processing (HPP), is a method of preserving and sterilizing food, in which a product is processed under very high pressure, leading to the inactivation of certain microorganisms and enzymes in the food.
- Also known as Pascalization.
- High Pressures applied at short periods of time (20minutes).



Dehydrating

Drying out foods such as fruits can reduce the amount of vitamin C they retain, but it can also concentrate other nutrients, particularly fibre in plant foods. Dehydrating food also makes food products more energy dense, which may contribute to weight gain. If a dehydrated food is reconstituted and cooked with water, further nutrients are leached out of the food and lost in the cooking water.

By Drying:

Dehydration is one of the 5 ways you can preserve the food.

Dried fruits, potatoes in a box, dried vegetables, powdered milk, pasta, powdered soups, powdered sauces, and powdered meat you see in the grocery store are dehydrated products.

When foods are dried, bacteria will become inactive.

2



Preparation of vegetables

Most vegetables are peeled or trimmed before cooking to remove the tough skin or outer leaves. But most nutrients, such as vitamins, tend to lie close to the skin surface, so excessive trimming can mean a huge reduction in a vegetable's nutrient value.



Losing nutrients through cooking

Some vitamins dissolve in water, so you lose your vitamins to the cooking water if you prefer to boil your vegetables. For example, boiling a potato can cause much of the potato's B and C vitamins to migrate into the boiling water. It is still possible to benefit from these nutrients if you consume the liquid, for example, by turning the potato and the liquid into a soup. Alternative cooking methods such as grilling, roasting, steaming, stir-frying or microwaving generally preserve a greater amount of vitamins and other nutrients.

Benefits of cooking food

It would be inaccurate to say that cooking food always lessens the nutrient value. Cooking can be advantageous in many ways, including:

- making the food tastier
- breaking down parts of vegetables that would otherwise be indigestible
- destroying bacteria or other harmful micro-organisms
- making phytochemicals more available, for instance, phytochemicals are more available in cooked tomatoes than in raw tomatoes. (Phytochemicals are chemicals produced by plants).

Preserving the nutrient value of vegetables

Some suggestions to retain the maximum nutrition in the foods you cook include:

- Store foods properly, such as keeping cold foods cold and sealing some foods in airtight containers.
- Keep vegetables in the crisper section of the refrigerator.
- Try washing or scrubbing vegetables rather than peeling them.
- Use the outer leaves of vegetables like cabbage or lettuce unless they are wilted or unpalatable.
- Microwave, steam, roast or grill vegetables rather than boiling them.
- If you boil your vegetables, save the nutrient-laden water for soup stock.

- Use fresh ingredients whenever possible.
- Cook foods quickly.

IMPACT OF NEW TECHNOLOGIES ON BIODETERIORATION


In recent years there has been both industrial ‘push’ and consumer ‘pull’ for minimally processed foods that are closer in nature to, for example, freshly prepared meals. There are many new and emerging technologies attracting research interest for food preservation.

Ohmic Heating


Ohmic heating works on the principle that all food materials have an inherent resistance to the flow of electricity. When an alternating electrical current (AC) is passed through a food product, the electrical resistance of that food causes it to heat up. Other names for this technology include resistance heating, direct resistance heating, Joule heating and Electroheating.

Since ohmic heating technology relies on the electrical resistance of the food to generate heat, if the electrical resistances of all components of the product are constant then the product heats uniformly. Particulate products can be heated uniformly, and since the process does not rely exclusively on heat transfer from the carrier fluid to the particulate, this can overcome some of the limitations of heat transfer found in conventional high-temperature/short-time (HTST) systems such as plate, tubular or scraped surface heat exchangers. Products such as fruit juices and concentrates, shelf-stable milk, puddings, soups and liquid egg products can all be heated rapidly, uniformly, and with a reduced impact on the organoleptic properties of the product. The advantages of ohmic heating over conventional heat exchangers can be summarized as follows:

- Rapid and uniform heating
- Higher particulate temperatures are attainable
- Enhanced product quality owing to rapid heating
- Reduced fouling of certain products
- Greater energy efficiency
- Instant switch-on/switch-off
- Reduced maintenance
- Quiet (dependent on type of pumps, etc.)
- Environmentally friendly.

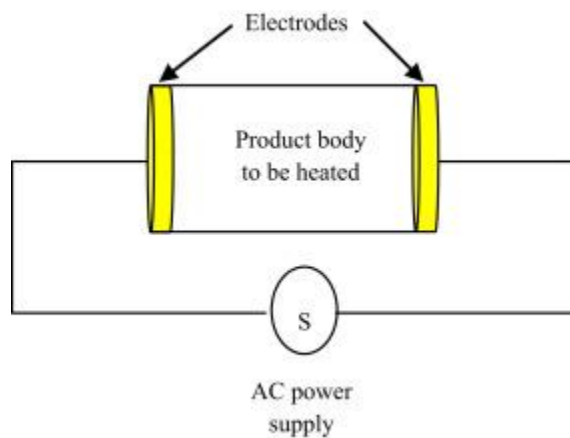

Schematic diagram illustrating the principle of ohmic heating

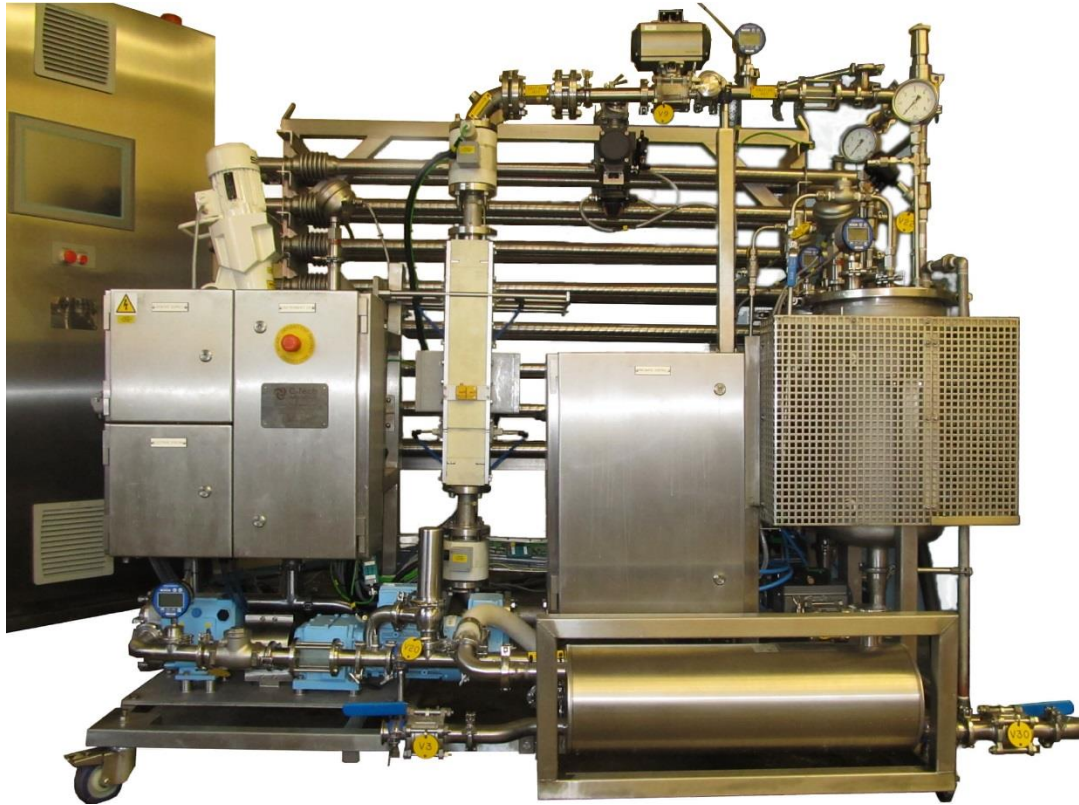

A pilot-scale ohmic heater for pasteurisation of fruit

Pressure Processing

High-pressure processing (HPP) is a non-thermal pasteurization process in which a food is subjected to pressures in the region of 300 to 600 MPa (3000 to 6000 bar) and held at pressure for a time, generally under 10 minutes. The applied pressure is usually transmitted via water in commercial systems but alternative materials such as propylene glycol or oil-in-water emulsions are employed in laboratory systems. A small temperature rise is observed during pressurization. This rise is typically around 3–4°C per 100 MPa of applied pressure for predominantly aqueous materials, but varies depending on the composition of the product.

The extremely high pressures employed in HPP inactivate vegetative micro-organisms, and because the process does not involve heating, the sensory and nutritional qualities of HPP products can be remarkably similar to those of their unprocessed counterparts. Bacterial spores are very resistant to commercially achievable pressures and, as a result, products that are currently on the market are chilled, and many are high acid or contain additional preservation hurdles such as the presence of antimicrobial compounds.



A horizontal batch high-pressure processing vessel

Microwave and Radio-Frequency Heating

Microwave and radio-frequency (RF) heating are well established thermal processing technologies that have found application in many process sectors. Commercial installations are common in the plastics, textiles, paper and board, wood and food processing industries. Food applications for the prevention of biodeterioration are not, however, in widespread use.

Microwave and RF heating are similar in that, as is the case for ohmic heating, heat is generated volumetrically throughout a product rather than having to rely on the slow conduction or convection of heat from the product surface to the core. Microwave and RF heating refers to the use of electromagnetic waves at particular frequency to generate heat in a food material.

The major advantage of microwave/RF heating is, as for ohmic heating, the rapid and volumetric temperature rise that can be achieved in foods. In food processing, the advantages of the rapid heating effects are amplified by the fact that both microwave and RF radiation can penetrate the food to a depth of several cm (microwave) or tens of cm (RF), promoting a volumetric heating effect throughout the food. This can have huge advantages over slower conventional heating processes, as the high-temperature/short-time process can achieve bacterial reduction, while thermal degradation of desired components is reduced.

The major difference between microwave and RF heating relates to the electrical field. In RF heating, the electrical field is generated in a directional manner between a pair of electrode plates; the food material to be heated is placed between the two plates to achieve the desired effect.

In microwave heating, the electrical component of the microwave field approaches the food product from all directions; microwave heating usually takes place in an enclosed cavity, or in close vicinity to a waveguide applicator.

The volumetric nature of both microwave and RF heating leads to a number of significant advantages over traditional surface heating techniques. Among the most important advantages are:

- Improved food quality
- Increased product throughput
- Improved energy efficiency
- Improved control of the heating process.

It should, however, be recognized that there is something of a trade-off to realize these key advantages.

There are several disadvantages associated with both microwave and RF process operations, the major drawbacks being:

- Difficulties in validating the heat treatment
- High equipment and operating costs.




Microwave cooking process in food industry

Pulsed Electric Field Processing

Pulsed electric field (PEF) processing is a technique in which a food is placed between two electrodes and exposed to a pulsed high-voltage field (typically 20–80 kV/cm). Treatment times are of the order of less than 1 second for preservation applications. This process reduces levels of micro-organisms while minimizing undesirable changes in the sensory properties of the food.


What is pulsed electric field?

- Pulsed electric field (PEF) used short electric pulses to preserve the food.
 - Pulsed electric field (PEF) treatment is an innovative and promising method for non-thermal processing of foodstuff.
 - It is one of the most appealing technology due to:
 - short treatment time (typically below 1 second).
 - reduced heating effect.
 - energy lost during heating food is minimized.
 - for fresh-like characteristics of food, along with high sensorial quality and nutrient content.
 - It is suitable for preserving liquid and semi-liquid foods removing micro-organisms and producing functional constituents.
- Examples: - milk, fruit juices, soup, egg etc.

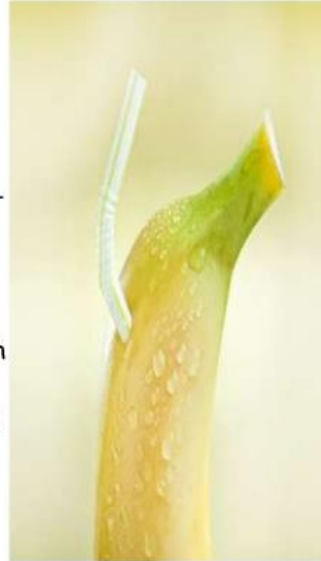

Electrical circuit for the production of exponential decay waveforms

- DC power supply
- Capacitor bank
- Charging resistor
- Discharge switch
- Treatment chamber

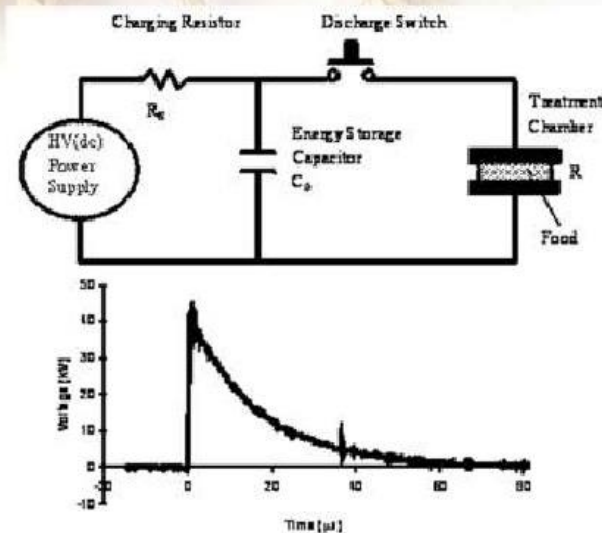




Pulsed electric field processing

Irradiation

The use of ionizing radiation to destroy micro-organisms or insects, or to improve the shelf life of perishable materials is well established, but it is a technology that remains highly controversial. X-rays and radioactivity were discovered at the end of the nineteenth century, and in the early years of the twentieth century the possible application of these modalities to the preservation of food was already being investigated. Gamma rays have very short wavelengths beyond the ultraviolet end of the electromagnetic spectrum. They penetrate deeply into food, making them very useful for food irradiation. The most widely used source of gamma rays is the radioactive isotope cobalt-60 (^{60}Co).

In general, Gram-negative micro-organisms such as the common spoilage bacteria *Pseudomonas* and important pathogens such as *Salmonella* and *Escherichia coli* are more sensitive to ionizing radiation than Gram-positive bacteria, but exceptions do occur. Different strains of the same organism can differ in their ability to survive irradiation. Pathogens such as *E. coli*, *Salmonella* spp., *Listeria monocytogenes* and *Campylobacter* species are all relatively sensitive to irradiation. Food-borne pathogens capable of growth at low temperatures, e.g. *Listeria* and *Aeromonas* species, are also sensitive to irradiation and will be eliminated by similar doses to those for *Salmonella*. Most food spoilage bacteria are sensitive to radiation, although strains of the *Acinetobacter-Moraxella* have some resistance to radiation and may form a large proportion of the bacterial survivors on food irradiated with moderate doses. In experiments carried out on red meat and poultry, certain strains of this genus were shown to be even more resistant to radiation than spores, although their presence in such food is not significant from either a public health or a sensory perspective.

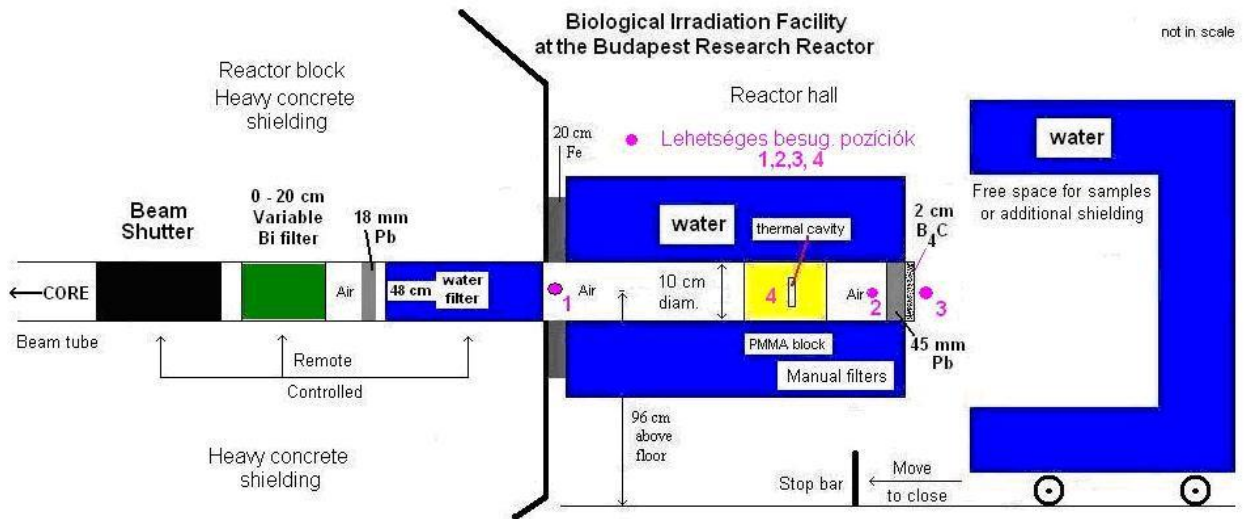

Schematic view of the Biological Irradiation Facility

BIODETERIORATION CONTROL

The main effort in the field of biodeterioration has been to develop, either empirically or by design, methods for preventing the biodeterioration of materials and thus preserve their value and usefulness for as long as possible. The first use of preventative methods was to enable the storage of foodstuffs after harvest or hunting, and these involved physical/mechanical techniques such as heat, cold, drying, osmotic pressure, and the use of mechanical barriers. Chemical methods were first introduced as fumigants (sulfur) and then as salts of mercury, copper, and zinc in the eighteenth and nineteenth centuries for preserving timber and other natural products in storage.

PHYSICAL METHODS

A knowledge of the physiology of the biodeteriogen is useful in determining the strategy of physical methods, from the gnawing and vertical jumping capabilities of rodents, to the tolerance of certain fungi to low water activities. Refrigeration down to $-20\text{ }^{\circ}\text{C}$ is often necessary to retard growth over a long period, although slow-growing moulds have been reported in large cold stores. It is usually accepted that growth is inhibited at the temperature at which the cell contents freeze. The ability of some organisms to produce their own intracellular 'antifreeze' may account for continued growth in extreme cold. It is not uncommon for fungal growth to occur on foods stored in domestic refrigerators where the temperature may be between 4 and $6\text{ }^{\circ}\text{C}$. At the other end of the temperature spectrum, temperatures in excess of $40\text{ }^{\circ}\text{C}$ will reduce the activity of a number of organisms, although temperatures above boiling point will be necessary for severe reductions in the viability of organisms which produce spores.

Complete sterilization is effected only at $121\text{ }^{\circ}\text{C}$ for a min of 15 min by a pressurized autoclave at 1.05 kgf/cm^2 (15 lb/in.). Bulky materials should be kept under these conditions for 60 min to allow for complete penetration of the heat. The exact procedure used will depend upon the thermostability of the product being sterilized.

The partial removal of water from a product or the maintenance of that product in an atmosphere low in moisture is commonly used in a variety of familiar situations. Desiccants are often placed inside the packaging of goods to absorb atmospheric water and reduce the humidity in the package, which in turn reduces the likelihood of microbial growth. The level of moisture in the air, often given as the RH, depends on the temperature, and both these parameters influence the expected lifetime of an object.

Although moisture content is an easily measured and monitored parameter, it is not an absolute indicator of the potential for microbial growth on a material. The water activity (A_w) of a material is a measure of the availability of the water, in this context, to the microorganism and the atmosphere in which it grows. It is expressed as the ratio of the vapour pressure of water over the material to the vapour pressure over pure water at the same temperature. The water activity of pure water is thus 1.0, and this decreases as solutes are added. Although the water activity of a material or substance is an intrinsic feature, preservation methods often rely on altering the ERH of a product by the addition of chemicals which change the water relations within that product. Propylene glycol and sorbitol are used in tobaccos and domestic animal food to impart a feeling of moisture or plasticizing effect on the product. These glycols also reduce the water activity sufficiently to retard the growth of moulds. Water activity is also reduced by use of inorganic salts and sugars; thus, the use of brine pickling for foods and sugar in jams (known as preserves!).

Radiations such as gamma rays, UV rays, and microwaves have all been employed to a limited extent as sterilizing agents, often where there has been a large-scale spoilage problem in, for example, a liquid product, and there is a possibility that the product may be reclaimed or reworked. Gamma irradiation has been used to treat books from a library after flooding resulted in widespread fungal growth. The ability of the radiation to adequately penetrate the material to be sterilized is paramount. Thus, UV systems have found a niche in the treatment of both potable and recirculating water used in industry, in which relatively thin films can be made to flow through the source of radiation. Even so, algal growth can develop or dirt can build up on the surface of the glass tubes through which the water flows, preventing the sterilization process. The residual preservative activity of irradiation is nil, and other precautions must be subsequently used to prevent reinfection.

Filters are also extensively used as barriers to microorganisms in aqueous recirculation systems. Membrane filters with pore sizes of either 0.45 or 0.22 μ m are routinely used to trap fungi and bacteria. Larger-pore filters can be employed for filamentous growths to reduce blockage problems. The use of physical barriers for the exclusion of larger organisms is a matter of common sense and knowledge of the habits of particular troublesome groups.

The nature of the surface of a material will affect the initial colonization by microorganisms. Smooth hydrophobic surfaces such as epoxy paint films are less likely to encourage colonization than are textured surfaces (external renderings or stucco plasters), which can harbour organic debris and water and provide crevices for microorganisms. A novel application of this approach has been devised for the prevention of external fouling on off-shore structures. It involves coating (200 μ m thickness) the vulnerable parts of the structure with a silicone rubber material (polydimethyl siloxanes are quoted as being the best class of compound) which contains a hydrophobic fluid. The fluid slowly and continuously exudes from the surface, preventing settlement of marine organisms.

CHEMICAL METHODS

The chemicals used in controlling biodeterioration in materials come in the form of gases (fumigants), dispersible powders, and liquids. There is some overlap, in that similar compounds may be formulated either for particulate dispersion as a fumigant or for use as a wettable powder in the control of insect biodeteriogens. Likewise, some compounds, for example formaldehyde, although employed as liquid preparations, exert their effect in the gaseous phase when incorporated into a product. Gaseous sterilization or fumigation is used to decontaminate materials which have already been infested with insects or microorganisms and which are not amenable to other forms of sterilization such as heat, radiation, or the addition of toxic chemicals in solution or suspension. Their successful use requires specialist knowledge and equipment to cope with the attendant dangers in handling the sterilants. Low oxygen atmospheres (less than 0.03%) have been used to treat infestations of woodborers and termites in museum artefacts. In this case, there is little danger to personnel, but rigid control of temperature and RH are essential if treatment is to be successful. Hence trained operators are necessary.

Chemical preservatives are variously referred to as biocides, bactericides, fungicides, fungi statics, antifouling compounds, and material protectants. The term preservative is probably the most accurate descriptive term for general use, because it infers that the protected material maintains its integrity and performance characteristics during storage and use. The term biocide is more commonly used to describe the range of chemicals used to combat biodeterioration in industrial products, although we still talk of wood preservatives and antifouling compounds in the building and boat industries, respectively.

To be effective, the ideal biocide (which does not, of course, exist!) should have the following characteristics:

- i. Toxic to the target deteriorogens
- ii. Non-toxic to human and non-target animal and plant life
- iii. It must be compatible with the product and not impart any unwanted colour or alter the properties of the material
- iv. It must partition into the phase where its activity is required
- v. It should be stable in both the concentrate and the diluted form
- vi. It should have a low cost: performance ratio

Major Chemical Actives

Oxidizing Agents

The biocide with the longest history in water disinfection, and still one of the most popular antimicrobials because of its low cost, is chlorine. It is used in industrial and domestic applications. However, it has a limited pH range, being less effective at alkaline levels, and is inactivated by reaction with proteins, as well as with ammonia-containing compounds. Other oxidizing biocides include hydrogen peroxide, ozone, and, of course, other halogens. Ozone is being increasingly used in place of chlorine in the treatment of domestic and industrial water supplies.

Aldehydes

Formaldehyde and glutaraldehyde are broad-spectrum biocides, with good sporicidal activity. They have good water solubility, but their main feature is that they easily vaporize, and this is put to good effect in situations in which there is poor hygiene in the factory where the product is made. If added (usually in combination with another active) early on in the manufacturing

process, they provide protection throughout the plant and then continue to release formaldehyde during storage of the finished product. They continue also to be used in combination with isothiazolinones as in-can biocides for paints and adhesives and in combination with parabens preparations.

Alcohols

The aliphatic alcohols, such as ethanol and isopropanol, tend to be used as disinfectants in antibacterial hand washes because of their speed of action in the destruction of bacteria and viruses. Because of their evaporation rate they cannot be used as biocides. However, benzyl alcohol and phenoxyethanol are used in cosmetic preservation as bactericides at concentrations up to 1%, often in combination with complementary actives.

Phenolics

Phenolic compounds, derived from coal tar, were the early effective disinfectants. Phenol itself is a potent carcinogen, but a range of chlorinated phenols is still available for both disinfection and preservation. They tend to be bactericides, but orthophenyl phenol has fungicidal activity, and its potassium salt is often used in combination with a quaternary ammonium compound to provide a broad-spectrum biocidal wash for the treatment of masonry before repainting.

Organic Acids and their Esters

Acetic, propionic, lactic, sorbic, and benzoic acids and their salts are traditionally used for preservation of acidic foodstuffs. They are weak acids which are active only in their undissociated states, thus limiting their effectiveness to the pH range 4–6. At this range they are employed to control yeast and mould growth in fruit juices and fermented milk products. The esters of hydroxybenzoic acid, known collectively as the parabens, are very widely used in the food and cosmetic industries as preservatives to inhibit moulds and yeasts.

Quaternary Ammonium/Phosphonium Compounds

They are rapid-acting antimicrobials and thus find application as disinfectants. However, because of their stability to pH and heat, they can be successful as longer-term biocides, providing they are not used in combination with anionic surfactants or high levels of protein and salts, which will severely reduce their efficacy. They have broad-spectrum activity towards bacteria and will control algal growth.

Isothiazolinones

This is a group of actives which might be termed ‘modern technology’ in the biocide field. They are characterized by the five membered isothiazolinone ring, which has a number of different substituents which give the resulting molecule varying biocidal properties, including, generally, good activity against microorganisms in biofilms. The main derivatives in commercial use are methyl, methylchloro, benzyl, octyl, and dichloro-octyl.

Other Organohalogen-Containing Biocides

The other major preservative used for in-can preservation is bromonitropropane diol (trade name, Bronopol). Bronopol shares the same deactivating characteristics as the isothiazolinones, but it is more effective as a bactericide than a fungicide. It is often used in combination with the water-soluble isothiazolinones to provide an extremely broad-spectrum preservative. Other important biocides are worth a mention include bromonitropropane diol, carbendazim, octylisothiazolinone, iodopropynyl butylcarbamate (IPBC), dichlorophenyl dimethylurea, carbendazim and octylisothiazolinone.

BIOLOGICAL METHODS

The use of one biological agent to suppress another is a strategy which receives periodic attention, particularly when it fails to achieve the desired result and the balance of nature is disturbed. One example in the control of wood decay is the use of immunizing commensals. Studies have shown that the fungus *Scytalidium lignicola* is antagonistic to *Lentinus lepideus*, a wood-decaying fungus; *Trichoderma viride* has also been used commercially. It may be introduced as a slug (spores of the fungus mixed in a dehydrated nutrient matrix and pressed into a pill) into the trunk of a standing tree; in a similar situation, the technique has also been suggested for protecting electricity transmission and telegraph poles. As biotechnological research develops as a discipline, the search for microbially produced chemical agents with highly specific antagonistic properties may see a resurgence, particularly in the control of contamination of fermentation processes.